

Type II and Type III* Reagent Grade DI Systems

Features & Benefits

◆ **No monthly rental charges:**

You purchase and own the system hardware at a reasonable cost.

◆ **No installation charges:**

The system is so easy to install, you can do it yourself.

◆ **No service charges:**

You can install the spare DI tank yourself, whenever you need it - even on weekends!

◆ **It puts you in control:**

If the DI tank exhausts in the middle of an experiment, or during a weekend, you can install the spare tank.

◆ **Competitively priced:**

See for yourself - compare the total cost of our Type II DI system with the competition.

General Description

AQUA SOLUTIONS Type II DI systems are available in six configurations to handle a wide variety of laboratory applications. The criteria for selecting the appropriate system is based on three factors:

1. *Daily water usage.*
2. *Incoming water quality.*
3. *Maximum required flow rate.*

System Availability

Model 2618S1 is a single tank 5 LPM system designed for applications that require up to 40 liters of water/day, when fed tap water containing up to 85 ppm of total dissolved solids.

Model 2618S2 is a dual tank 5 LPM system designed for applications that require up to 80 liters of water/day, when fed tap water containing up to 170 ppm of total dissolved solids.

Model 2635S1 is a single tank 6 LPM system designed for applications that require up to 80 liters of water/day, when fed tap water containing up to 170 ppm of total dissolved solids.

Model 2635S2 is a dual tank 6 LPM system designed for applications that require up to 160 liters of water/day, when fed tap water containing up to 340 ppm of total dissolved solids.

Model 2635S3 is a triple tank 6 LPM system designed for applications that require up to 240 liters of water/day, when fed tap water containing up to 340 ppm of total dissolved solids.

The basic system price *does not include a dispenser or faucet*. Many options can be used to dispense the purified water. Refer to page 2 for dispensing options.

Note: The capacities (in liters of water/day) for these systems can be increased ten-fold, when the feed water is pretreated via Reverse Osmosis (RO). RO may be required when the feed water contains more than 150 PPM TDS.

* These systems produce purified water that meets or exceeds Type II and/or Type III reagent grade water specifications. See page 2 for details.



Model 2618S2

AQUA SOLUTIONS, INC.

8 Old Burnt Mountain Road
Jasper, GA 30143 USA

Phones: 706-692-9200

800-458-2021

Fax: 706-692-9203

E-mail: mail@AquaA.com

Internet: www.AquaA.com

Type II and Type III Reagent Grade DI Systems



Specifications & Ordering Information

Model Number	2618S1	2618S2	2635S1	2635S2	2635S3
Maximum System Flow Rate (Liters/Minute)	5	5	6	6	6
Number of Installed DI Tanks Included with System	1	2	1	2	3
Number of Spare DI Tanks Included with System	1	1	1	1	1
Capacity per DI Tank (Grains as CaCO ₃)	3,000	3,000	6,000	6,000	6,000
Total Installed DI Capacity (Grains as CaCO ₃)	3,000	6,000	6,000	12,000	18,000

Resin Refills and Replacement Cartridges:

2618DIR - 1/4 Cubic Foot Resin Refill * 2635DIR -	1	1	N/A	N/A	N/A
1/2 Cubic Foot Resin Refill * CC1050 - 10"	N/A	N/A	1	1	1
Activated Carbon Prefilter Cartridge DC2004 -	1	1	1	1	1
0.22 µm Final Filter Capsule ** RA1002A - 10"	Optional	Optional	Optional	Optional	Optional
0.2 µm Final Filter Cartridge ***	Optional	Optional	Optional	Optional	Optional

* Exchange - based on return of exhausted DI tank

** Used with optional 2700N Remote Dispenser

*** Used with optional CH1004FF Final Filter Assembly

Accessories, Options and Parts:

-04 after the Model number indicates 1/4" tube instead of 3/8"

-08 after the Model number indicates 1/2" tube instead of 3/8"

-RO after the Model number eliminates the carbon pre-filter

2618DI - 1/4 Cu. Ft. Complete DI Tank Assembly (Filled)

2635DI - 1/2 Cu. Ft. Complete DI Tank Assembly (Filled)

2615F - Polypropylene Gooseneck Bench Mount Faucet

2615FL - Polypropylene Faucet with Monitor Light


2700N - Remote Dispenser Gun with Filter Capsule

2701 - DI Spray Gun

CH1004FF - 10" Final Filter Housing (No Cartridge)

CH1004PF - 10" Sediment Prefilter Assembly with Cart

M-6AQ-ASSY - Digital Resistivity Monitor 0-20 Megohm

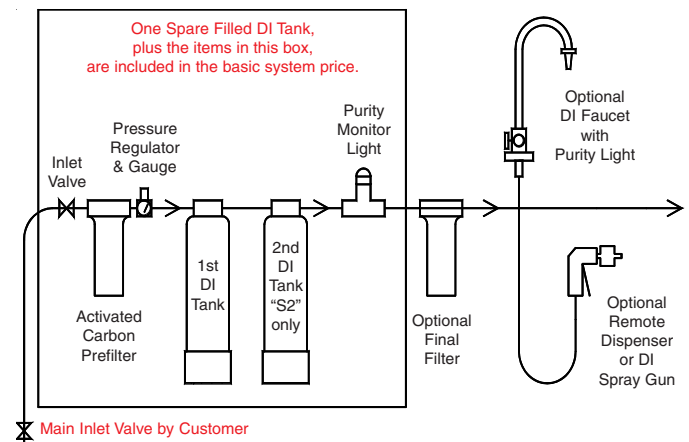

Type II Laboratory Applications: ASTM defines Type II water as having >1 megohm-cm resistivity, which equals about 1/2 part per million of total dissolved solids (TDS). CAP and NCCLS define Type II water as having >2 megohm-cm resistivity. Type II water costs considerably less to produce than Type I water, making it a viable alternative for many laboratory and clinical applications. **Note that ASTM defines Type III water as having 4.0 megohm-cm resistivity, while CAP and NCCLS define Type III water as having >1 megohm-cm a resistivity.**

Laboratories can use Type II water for analytical and clinical procedures that do not specifically require Type I water. Type II water is also routinely used to wash and rinse glassware, either manually or in the final rinse cycle of an automatic glassware washer.

Pretreatment Applications: Type II water can be used as feed to a Type I water purification system. This is a cost savings measure that can be used when the incoming tap water contains more than 170 ppm total dissolved solids, and/or the Type I water usage is high. It saves money, because Type II DI modules cost less than Type I DI modules.

Type II DI vs Reverse Osmosis Pretreatment: While a Type II DI pretreatment system costs considerably less to purchase than a reverse osmosis pretreatment system, it costs considerably more to operate. Thus, the decision to pretreat via Type II DI or RO should be made based on comparing both the capital and the operating costs of both systems. In particular, reverse osmosis should be considered when the incoming tap water contains much more than 170 parts per million of total dissolved solids, and/or water usage on the Type I or Type II DI system exceeds 40 liters per day.